


With excellent productivity, it operates with various abrasives in the most varied types of surface preparation. It can be used autonomously, coupled with an abrasive reclaim in a room or blasting cabinet.

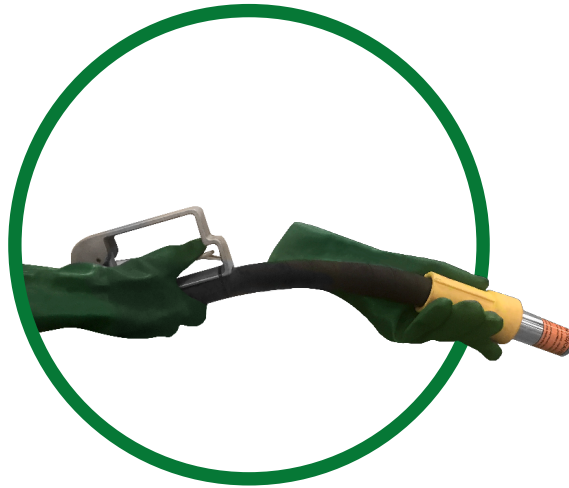

pneumatic remote control.

Characteristics

- **Pop-up ball valve:** higher sealing capacity, less wear.
- **Non-return valve:** protects the ball valves and the air filter against the action of the abrasive.
- **Conical bottom:** ensures more abrasive flow.
- **Well-positioned inspection windows:** facilitate maintenance.
- **Abrasive hoses with anti-static rubber:** more flexible and durable.
- **Long venturi-type nozzles with larger inlet mouth:** higher productivity.
- **Abrasive metering valve made of urethane and equipped with inspection cover:** dosing precision, longer working life and ease of maintenance.

Specifications

Single chambe: one outlet

Model	Capacity		Venturi nozzle		Abrasive material hose (diamentor x length)			
	Liters	Cu. ft.	mm	"	mm	m	"	'
P-100-3205	100	3,5	3,2	1/8	19	5	3/4	16
P-280-7910	280	10	7,9	5/16	25	10	1	32
P-280-7920	280	10	7,9	5/16	25	20	1	65
P-280-9510	280	10	9,5	3/8	32	10	1.1/4	2
P-280-9520	280	10	9,5	3/8	32	20	1.1/4	65
P-280-12710	280	10	12,7	1/2	38	10	1.1/2	32
P-280-12720	280	10	12,7	1/2	38	20	1.1/2	65
P-560-9510	560	20	9,5	3/8	32	10	1.1/4	32
P-560-9520	560	20	9,5	3/8	32	20	1.1/4	65
P-560-12710	560	20	12,7	1/2	38	10	1.1/2	32
P-560-12720	560	20	12,7	1/2	38	20	1.1/2	32

Single chamber: two or more outlets

Model	Outlets	Capacity		Venturi nozzle		Abrasive material hose (diamentor x length)			
		Liters	Cu. ft.	mm	"	mm	m	"	'
P-560-2-7910	2	560	20	7,9	5/16	25	10	1	32
P-0560-2-9510	2	560	20	9,5	3/8	32	10	1.1/4	32
P-0560-2-7920	2	560	20	7,9	5/16	25	20	1	65
P-0560-2-9520	2	560	20	9,5	3/8	32	20	1.1/4	65
P-1120-2-9520	2	1.120	40	9,5	3/8	32	20	1.1/4	65
P-1120-2-12720	2	1.120	40	12,7	1/2	38	20	1.1/2	65
P-3400-4-9520	4	3.400	120	9,5	3/8	32	20	1.1/4	65
P-3400-4-12720	4	3.400	120	12,7	1/2	38	20	1.1/2	65
P-4530-4-12740	4	4.530	160	12,7	1/2	38	40	1.1/2	130

Double chamber: one or more outlets.

Model	Outlets	Capacity		Venturi nozzle		Abrasive material hose (diamenters x length)			
		Liters	Cu. ft.	mm	"	mm	m	"	'
P-DC-0280-7910	1	280	10	7,9	5/16	25	10	1	32
P-DC-0280-9510	1	280	10	9,5	3/8	32	10	1.1/4	32
P-DC-0560-2-7910	2	560	20	7,9	5/16	25	10	1	32
P-DC-0560-2-9510	2	560	20	9,5	3/8	32	10	1.1/4	32
P-DC-0560-2-7920	2	560	20	7,9	5/16	25	20	1	65
P-DC-0560-2-9520	2	560	20	9,5	3/8	32	20	1.1/4	65