





Equipment for external pipe blast has exceptional production rates and a low operational cost due to the combination of factors written below.

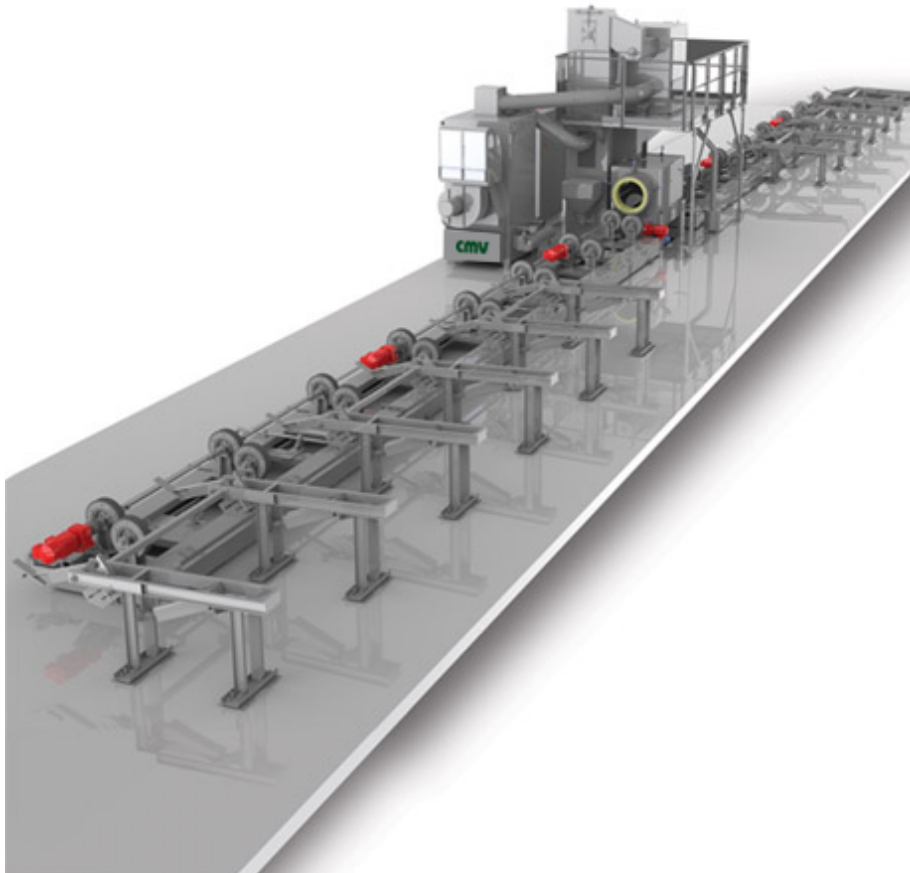

- **Tables with adjustable speed and angle:** allow to operate with only one blast wheel (up to 100 HP), reducing the operational cost, obtaining a higher production rate and reducing the setup time.
- **Position the blast wheel:** always keep the same distance between the blast wheel and the pipe, independently of its diameter, reducing the wear of the blast wheel and facilitates the access for maintenance.
- **High-efficiency blast wheel:** because of the special design, especially the blades, have the best ratio of flow x launch speed of the shot, all that with a low noise level.
- **Dust collector:** the unique system of downward flow, reduces the wear of the filter elements, air consumption for cleaning and system power requirements.
- **Seals:** it has a quick-change sealing system, reducing the setup time.

Specifications

Maximum diameter of the pipe: **254 mm (10")**

Model	TB-10.1.11	TB-10.1.15	TB-10.1.22
Blast wheel model	B-306	B-306	B-330
Blast wheel power (kw/HP)	11/15	15/20	22/30
Flow (exhaust system)	1765 cfm	1765 cfm	1765 cfm
Maximum production rate sq.Ft/min	16	21	32

Maximum diameter of the pipe: **609 mm (24")**

Model	TB-24.1.11	TB-24.1.15	TB-24.1.22	TB-24.1.30	TB-24.1.37	TB-24.1.45	TB-24.1.55	TB-24.1.75
Blast wheel model	B-306	B-306	B-330	B-356	B-356	B-356	B-356	B-356
Blast wheel power (kw/HP)	11/15	15/20	22/30	30/40	37/50	45/60	55/75	75/100
Flow (exhaust system)	1765 cfm	1765 cfm	1765 cfm	3531 cfm	3531 cfm	3531 cfm	3531 cfm	5297 cfm
Maximum production rate sq.Ft/min	16	21	32	43	53	64	80	107

Maximum diameter of the pipe: **1.016 mm (40")**

Model	TB-40.1.11	TB-40.1.15	TB-40.1.22	TB-40.1.30	TB-40.1.37	TB-40.1.45	TB-40.1.55	TB-40.1.75
Blast wheel model	B-306	B-306	B-330	B-356	B-356	B-356	B-356	B-356
Blast wheel power (kw/HP)	11/15	15/20	22/30	30/40	37/50	45/60	55/75	75/100
Flow (exhaust system)	1765 cfm	1765 cfm	1765 cfm	3531 cfm	3531 cfm	3531 cfm	3531 cfm	5297 cfm
Maximum production rate sq.Ft/min	16	21	32	43	53	64	80	107

Maximum diameter of the pipe: **1.524 mm (60")**

Model	TB-60.1.11	TB-60.1.15	TB-60.1.22	TB-60.1.30	TB-60.1.37	TB-60.1.45	TB-60.1.55	TB-60.1.75
Blast wheel model	B-306	B-306	B-330	B-356	B-356	B-356	B-356	B-356
Blast wheel power (kw/HP)	11/15	15/20	22/30	30/40	37/50	45/60	55/75	75/100
Flow (exhaust system)	1765 cfm	1765 cfm	1765 cfm	3531 cfm	3531 cfm	3531 cfm	3531 cfm	5297 cfm
Maximum production rate sq.Ft/min	16	21	32	43	53	64	80	107